




JILONG
Since 1993


KL-6200 FiberSMART OTDR



Multi-function




1m Event dead zone



140km
Largest range



Self calibration



Dual wavelengths testing



3-year
Warranty



Development History

30 years of manufacturing



1993

Jilong Communication Technology, the predecessor of Nanjing Jilong, was established and launched China's first model of fusion splicer KL-100

1996

JILONG launched optical fiber fusion splicer, ending the history of dependence on imported splicer

2001

The new vertical automatic optical fiber fusion splicer KL-200 launched

2008


JILONG launched the handheld high-precision OTDR KL-6210, this is the first generation OTDR independently R&D and produced by JILONG

2022

The new OTDR KL-6200 OTDR launched



Application scenarios

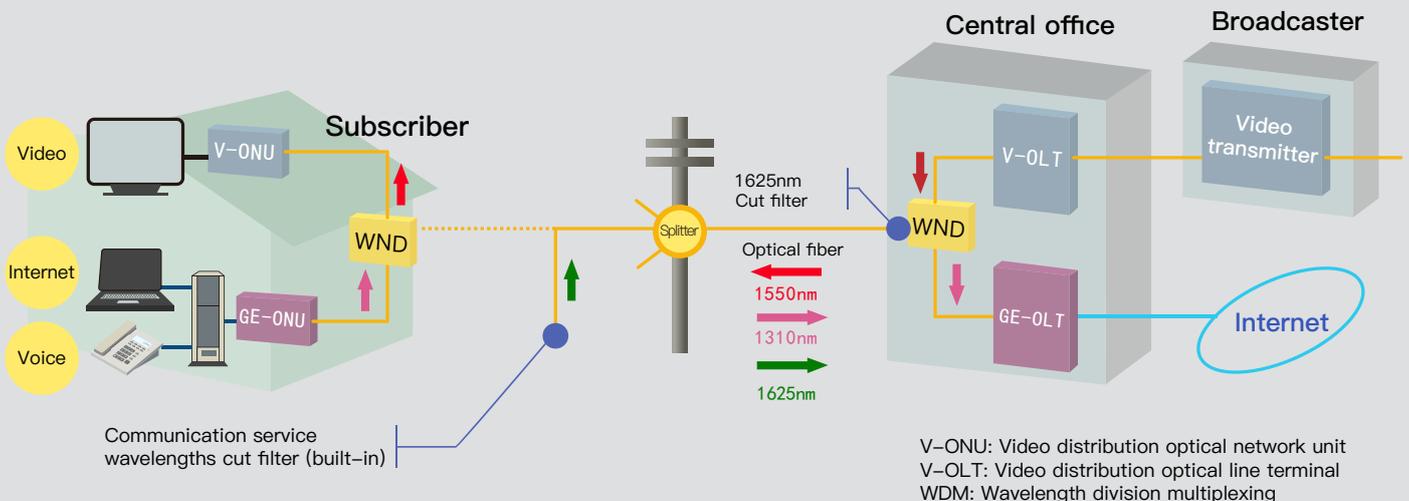

JILONG KL-6200 OTDR is widely used in optical network terminals (ONT), FTTH distribution (F2) fiber characterized distribution hubs (FDH), fault diagnosis and fault finding.

Product Features

- Long-haul network testing
- Access network testing
- FTTx/PON testing through splitters
- Compact, rugged, light weight 0.7kg
- All new UI design with innovation
- 32dB Dynamic range
- 1m Event dead zone
- Bult-in OPM、SLS、VFL、RJ45、FIP modules
- Link Map & Pass/Fail judgment functions
- Dual wavelengths testing




Multi-function

01

OTDR Testing


OTDR Dual wavelength simultaneous testing, intelligent trace analysis, multi-interface result display, easy operation

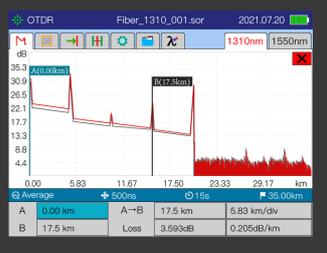

02

Visual Fault Locator


VFL Stable lighting, strong light source, two modes-- PW & CW

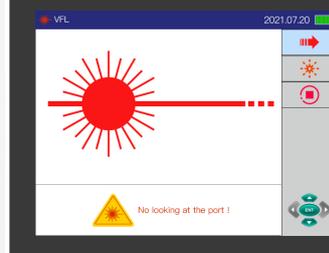

03

Optical Power Meter


For measuring absolute optical power or relative loss of optical power through a length of fiber

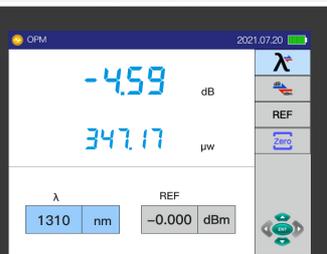

04

Stabilized Light Source


Stable light source, used in combination with a power meter

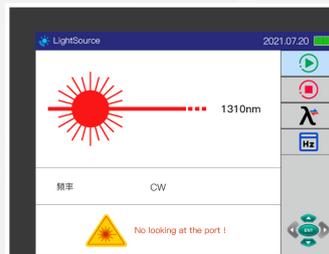

05

Fiber Inspection Probe

Optional inspection probe to inspect fiber interface.

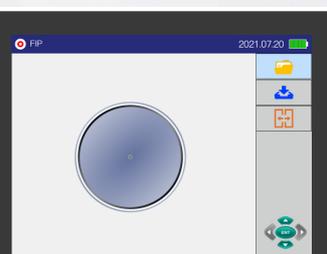

06

RJ45 Networks Test

Network cable sequencing

Number	EIA/TIA568A	Number
1	Green-White	1
2	Green	2
3	Brown-White	3
4	Brown	4
5	Blue-White	5
6	Blue	6
7	Orange-White	7
8	Orange	8

Result: Test complete!



Dual Working Mode


Four test modes meet your measurement needs

Real-time test:

Monitors link measurement information, but does not analyze event information.

Average test:

Fixed time measurement, the results and event information will be analyzed after the measurement.

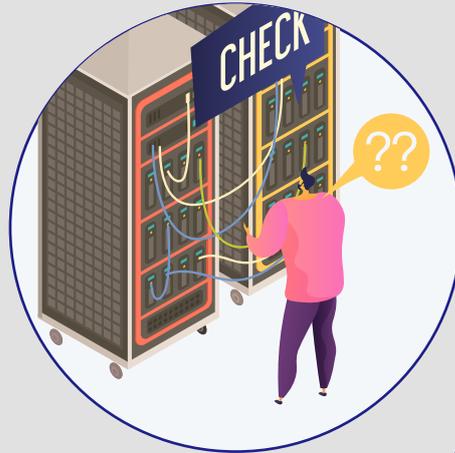

Intelligent automatic

It is convenient for beginners to quickly complete the test



Expert Manual Mode

Select the expert manual mode to test



Interface upgrade

Brand-new UI Design

The screenshots display the following data:

OTDR Graph Data:

Point	Distance (km)	Loss (dB)	Ref. (dB)	Att. (dB/km)
S	0.00	-34.657	0.311	
1	2.58	0.073	0.317	
2	5.01	3.104	-31.349	0.303

Measurement Summary:

Wave(nm)	Total Atten.(dB)	Atten.(dB)	Total Events
1310	7.103	0.354	6
1550	7.365	0.367	6

OTDR Settings:

Setting	Value
Pulse	Auto
Test time	15s
Unit of distance	km
Wavelength	1310nm

Test Results:

Point	Distance (km)	Loss (dB)	Ref. (dB)	Att. (dB/km)
A	0.00 km			
B	17.5 km	3.593dB		0.205dB/km


Result: Test complete!



Intelligent trace analysis

Intelligent trace analysis Dynamic display of test results

The test results are shown in a trace with distance on horizontal axis, lost power on vertical axis. When too many events, the horizontal and vertical axes can be enlarged to analyze.

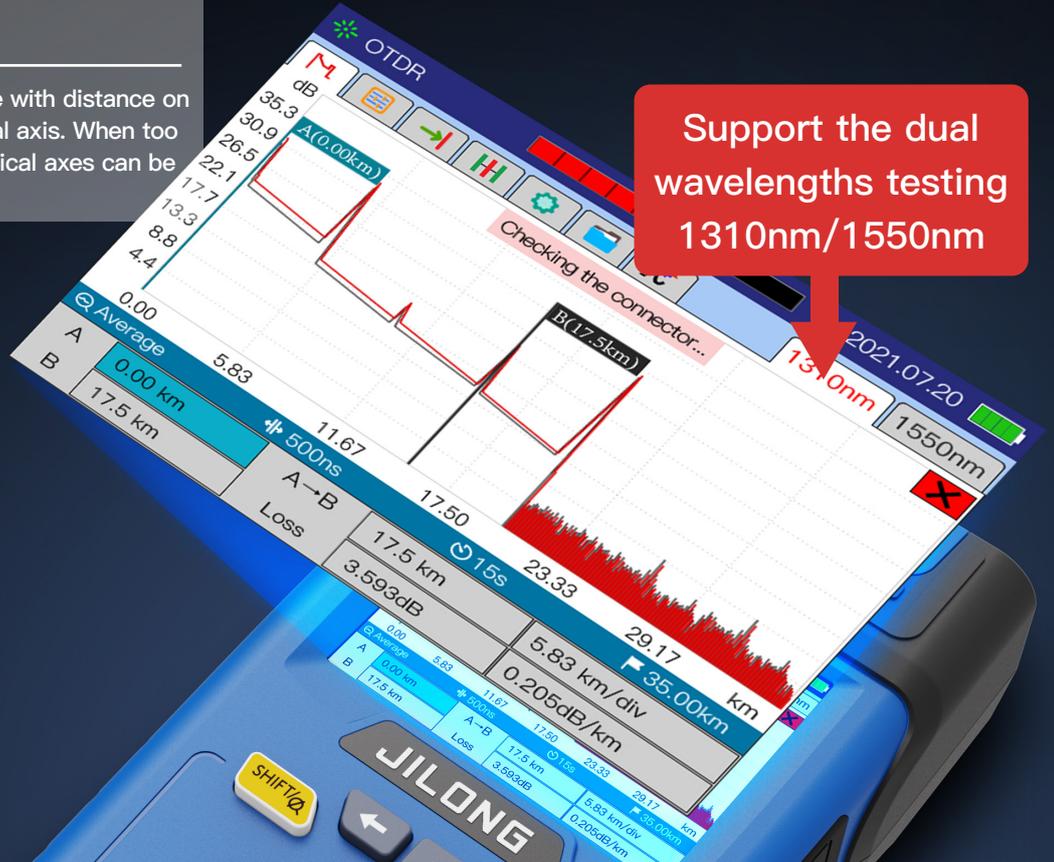


Support the dual wavelengths testing
1310nm/1550nm



Events List & Summary View


Events List

Optical cable breakpoint, loss, length, bending, connection, etc., in the trace, the loss or reflection obtained by the test is represented by events, and three event parameters can be viewed at the same time.

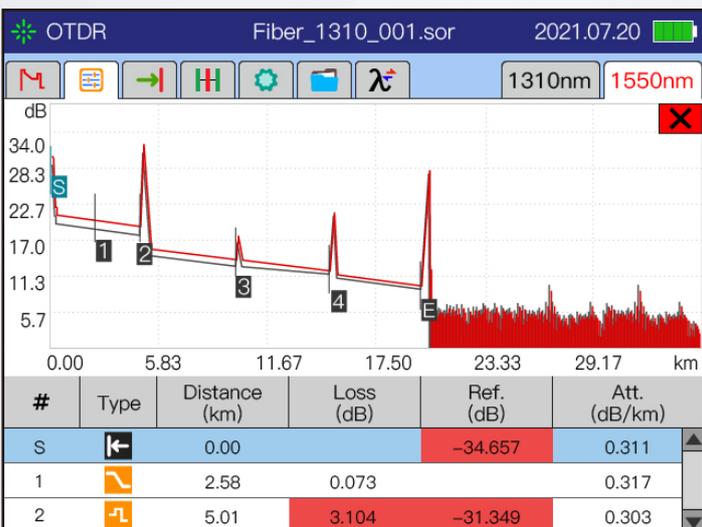


Summary View

Trace figure, length, total attenuation and attenuation coefficient in (dB).

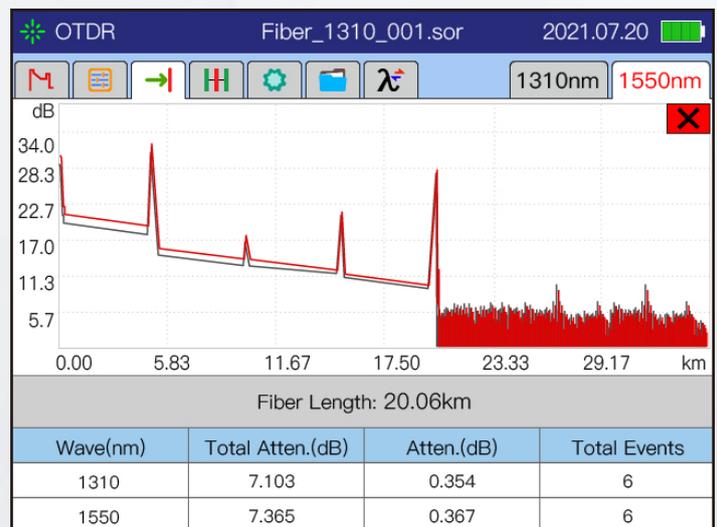

Link Map

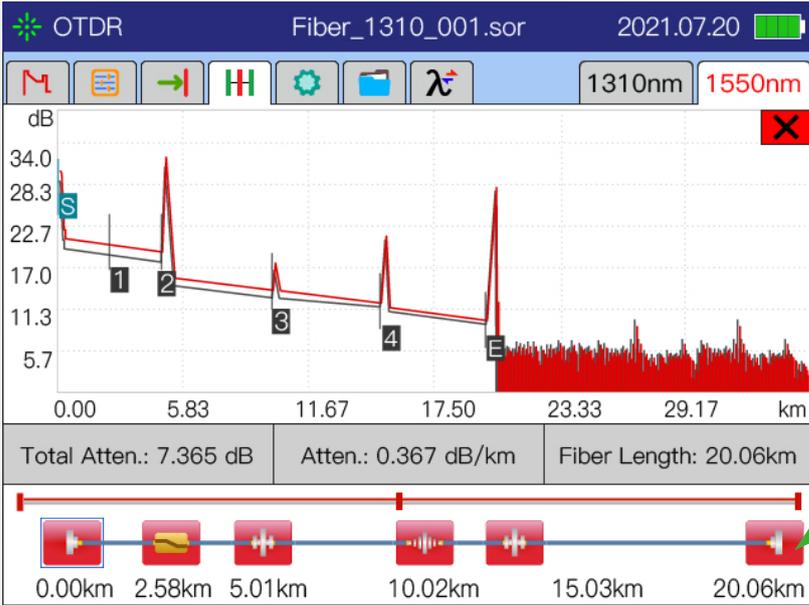

Link Map Function Icon Displays Events


A simple and intuitive graphical interface displays the length, event type, and breakpoint location of optical fiber links. One-click test operation enables instant isolation and evaluation of optical fiber failures.

Splitter Test

Test Three-level Splitter, up to 1:32

1:4


1:8

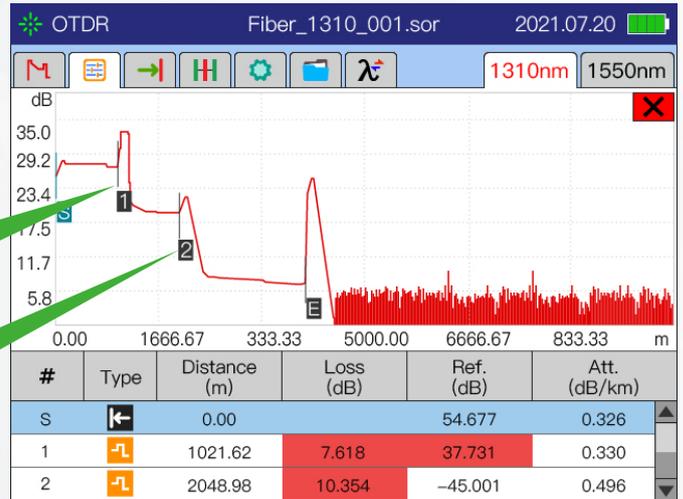


1:4

1:4

1:2

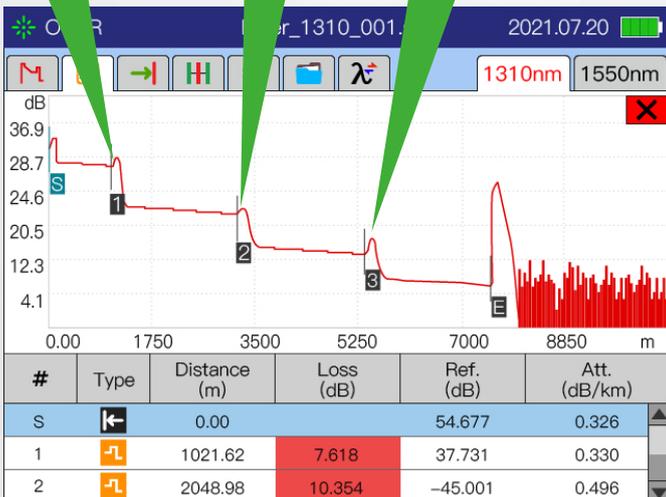


1:16

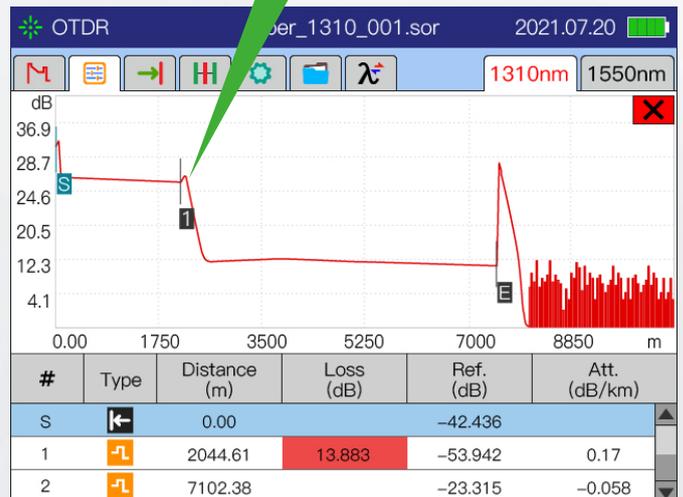

Self Calibration Convenience to Maintenance

Circuit board
Optical circuit
Optical device

After the machine has been used for a long time, when its accuracy is not enough, it can perform self-calibration, reduce maintenance time and save costs

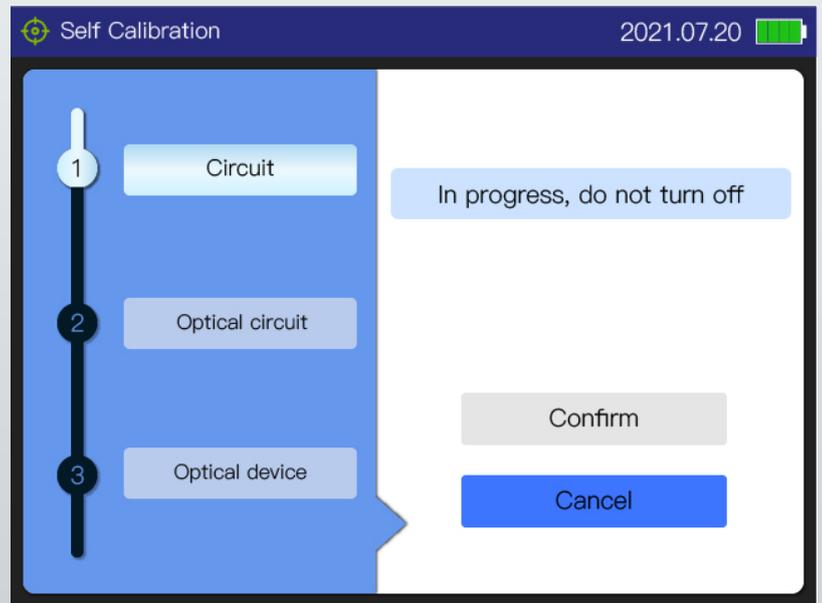

Read and analyze on PC Mass Traces Operation

View the sor file in the OTDR trace manager, mass traces operation, add/delete events, bidirectional trace analysis, print preview, etc.

Fiber Connector



SC



ST (Optional)



LC (Optional)



FC (Optional)

Standard Package

- ① Carry Bag
- ② OTDR main body
- ③ Inspection Certificate
- ④ Power adapter
- ⑤ Gallus
- ⑥ Quick Reference Guide
- ⑦ Calibration Certificate
- ⑧ Brochure—JILONG/TAWAA

①



②



③



④



⑤



⑥



⑦



⑧





Specifications

OTDR Specifications		
Model	KL-6200-S	KL-6200-P
Wavelength (nm)	SM 1310/1550	PON 1310/1550/1625 (built-in filter)
Dynamic range (dB)	32/30	32/30/28
Number of optical port	1	2
Applicable fiber	SM (ITU-T G.652)	
Distance range (km)	0.5,1,2,5,10,20,35,50,75,100,150,200	
Pulse width (ns)	5,10,20,50,100,200,500,1000,2000,10000,20000	
Event dead zone*1 (m)	1	
Attenuation dead zone*2 (m)	3.5	
Number of sampling points	Max.80000	
Sampling resolution	Min.0.04m	
Distance measurement accuracy	$\pm(0.75 \text{ m} + \text{Measurement distance} \times 2 \times 10^{-5} + \text{Sampling resolution})$	
Loss measurement accuracy	$\pm 0.03 \text{ dB/dB}$	
Return loss measurement accuracy	$\pm 2 \text{ dB}$	
Optical Power Meter Module (Built-in)		√
OPM	Wavelength (nm)	800 ~ 1650nm
	Power range	-70 ~ +6dBm
	Measure accuracy	< ($\pm 0.2\text{dB}$ or $\pm 5\%$)
	Display resolution	0.01dB
	Optical input port	SC/UPC + 2.5mm Universal ferrule
Stabilized Light Source Module (Built-in)		√
SLS	Wavelength (nm)	1310/1550
	Output power	$\geq -10\text{dBm}$
	Modulation mode	CW, 270 Hz, 1 kHz, 2 kHz
	Laser class	Class 1M or Class 1
	Optical input port	OTDR port
Visual Fault Locator Module (Built-in)		√
VFL	Wavelength (nm)	650
	Output power	10mW
	Modulation mode	CW, CHOP (2 Hz)
	Laser class	Class 3R
	Optical input port	2.5 mm Universal ferrule type
Fiber Inspection Probe (Built-in)		Optional
FIP	Magnification	250X
	Resolution(um)	≥ 1.0
	Electrical interface	USB2.0
	Optical Connector	FC/UPC,SC/UPC,ST/UPC
	Sensor	1/3 inch
		√
RJ45	Wavelength (nm)	CAT5, CAT6
	Distance of Cable Collationl	300m
	Distance of emitting signal	300m

General Specifications	
Link Map	√
Pass/Fail judgment	√
Distance unit	m, km, mile, ft, kft
PC Analysis Software	√
Languages	English, Español, Chinese, Português, Français, Русский
Optical connector	SC/UPC (FC/UPC,ST/UPC,LC/UP is Optional)
Display	3.5-inch color TFT LCD (Resolution: 640 × 480)
Electrical interface	Charge port × 1, USB 2.0 × 3, RJ45 × 2
Operating temperature	-10 ~ 50°C (0 ~ 40°C when AC adapter is being used. 0 to 35°C when battery is be charged)
Storage temperature	-20 to 60°C
Altitude	4000 m
Humidity	0 to 90% RH (20 to 90% with 739874 AC adapter, non-condensing)
Power requirements	100 – 240V AC, 50/60Hz (AC adapter)
Battery	3000mAh
LED Light illumination	≥15000mcd
Operating time*3	5 hours
Data storage	Internal storage: ≥1000 waveforms, External storage: USB memory
Dimensions	118 mm (W) × 218 mm (H) × 55 mm (D)
Weight	Approx. 0.73 kg (including internal battery and protectors, excluding OTDR unit and options)

Notes:

1. Minimum pulse width, return loss: ≥55 dB (≥40 dB for 850/1300 nm), group refractive index: 1.5, at 1.5 dB below the unsaturated peak level.
2. Minimum pulse width, group refractive index: 1.5, at a point where the backscatter level is within ±0.5dB of the normal level. For SMF, at 1310nm, return loss: ≥55dB.
3. New Battery

All specifications valid at 23°C ± 2°C (73.4°F ± 3.6°F) unless otherwise specified.

